
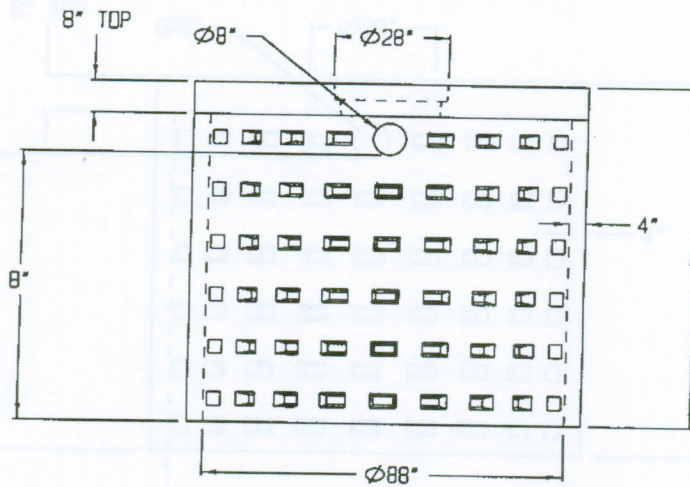


8' DIAMETER DRYWELL H-20

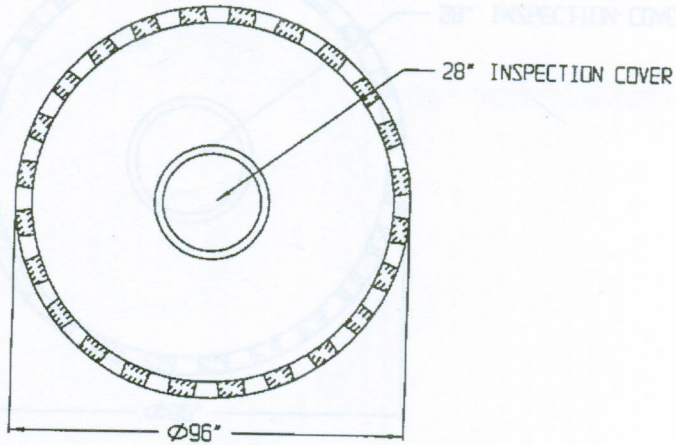

Dimension	Capacity (Gals.)	A	B
		Overall Height	Inlet Height
8 x 4	1500	56"	36"
8 x 6	2250	80"	60"
8 x 8	3000	104"	84"
8 x 10	3750	128"	108"

SPECIFICATIONS:

- * Concrete Minimum Compressive Strength-4,000 PSI @ 28 days.
- * Steel Reinforcement:
#4 Deformed Bar (Gr. 60) ASTM A-615, or equal.
- * Fibre Mesh Reinforced ASTM C-1116: Euclid Tuf-Strand, or equal @ a Rate of 3.33 lbs/cy.
- * Approximate Weight: Top Slab 5,000 lbs., 2' Section 2,100 lbs., 4' Section 4,200 lbs.



2 COMMERCE DRIVE PO BOX 5133, BROOKFIELD, CT 06804
 PHONE (203) 775-0230 FAX (203) 740-2059 WWW.EASTERNPRECAST.COM

PROJECT			
TITLE			
DRAWN BY Brell B.		DATE 5-01-05	
SCALE	ONG. NO.	SHEET	REV.
REP. CHART	DW8RND	1 OF 1	D