


SPECIFICATIONS:

- * Concrete Minimum Strength-4,000 PSI at 28 Days W/ Fibernesh.
- * Steel Reinforcement-# 3 Rebar Grade 40.
- * Construction Joint (s) Sealed With Butyl Sealant.
- * Meets ASTM C127.
- * Meets A-3 External Loading (300 PSF) Applied Uniformly Over Top, Bottom, And Walls. It Is The User's Responsibility To Install So That This Loading Criteria Is Not Compromised, Considering Soil Types, Ground Water Elevations, Backfill Requirements, and Applicable Live Loads.
- * Outlet Baffle Supplied With Gas Deflector Or Approved Filter. Installation By Others.
- * Bottom Compartment Baffle Can Be Removed For Use As Pump Chamber.

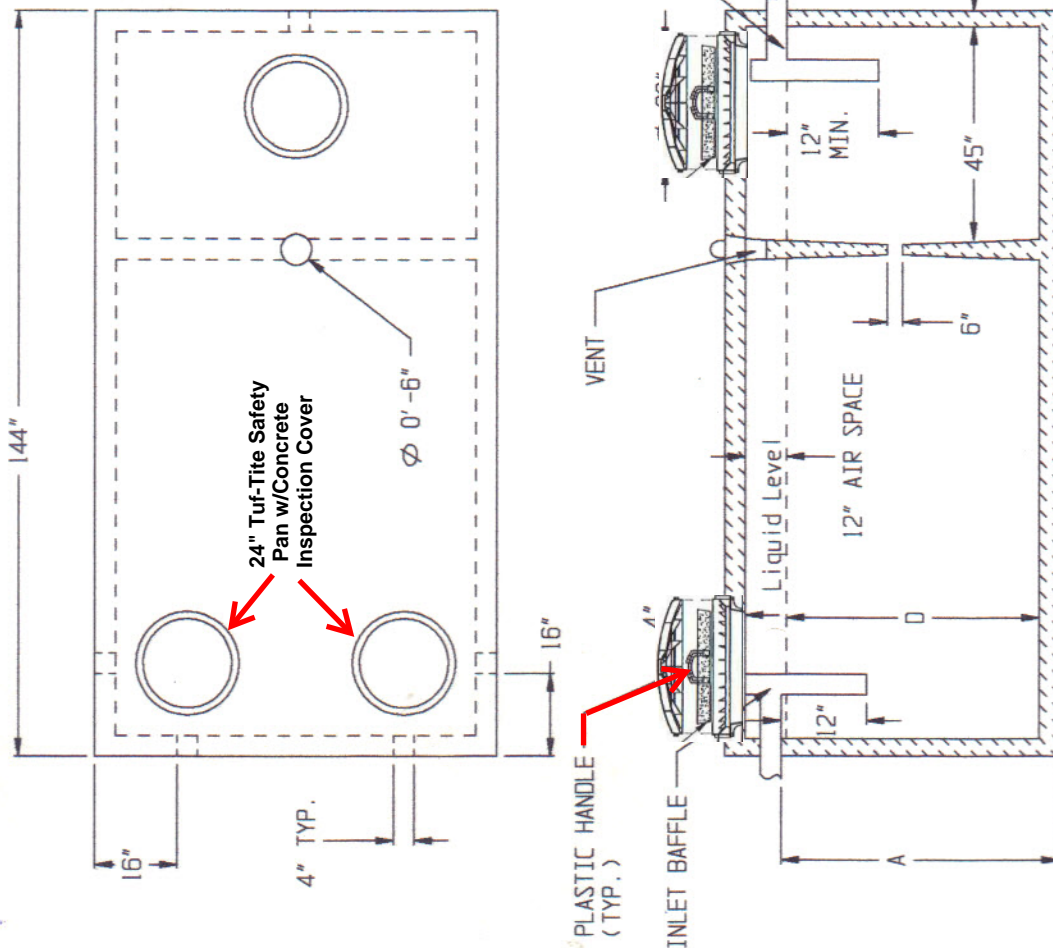

	A	B	C	D	
Tank Cap.	Inlet Hgt.	O.A. Hgt.	Outlet Hgt.	Liquid Level	Max. Backfill Cover
1500 Gallon	43"	56"	40"	36"	36" (Soil not to exceed 100 lbs/cu. Ft.)
2000 Gallon	55.5"	68"	52.5"	48"	36" (Soil not to exceed 100 lbs/cu. Ft.)
2500 Gallon	67"	81"	64"	68"	36" (Soil not to exceed 100 lbs/cu. Ft.)
3000 Gallon	79.5"	93"	76.5"	72"	36" (Soil not to exceed 100 lbs/cu. Ft.)
3500 Gallon	93"	106"	90"	86"	36" (Soil not to exceed 100 lbs/cu. Ft.)
4000 Gallon	105.5"	118"	102.5"	98"	36" (Soil not to exceed 100 lbs/cu. Ft.)

DWG # STREG-2

EASTERN PRECAST CO. INC.

P.O. Box 5133 2 Commerce Dr., Brookfield, CT 06804
Phone (203) 775-0230 775-9380 Fax (203) 740-2059